



DATA SHEET

Premium Efficiency Motor: **FD10-18-215T**,**60 Hz**

Document Generated: 25-Sep-2024

Document ID:

Customer:

MOTOR INFORMATION

HP	10
RPM	1800
Phase	1
Frequency	60 Hz
Voltage	230
Frame Size	215T
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.15
Poles	4
Full Load Speed	1765
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	K
Duty Cycle	S1 / Continuous
Slip	1.96%
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Mounting Type	Rigid Base
Standard	NEMA MG-1
Approvals	UL, CE

EFFICIENCY/POWER FACTOR

LOAD	EFF	P. F.
100%	87.5 %	95.9
75%	86.2 %	94.10
50%	80.8 %	88.7

TORQUE

FULL LOAD	LRT	BDT
29.96 lb.ft.	509 %	230 %

AMPERAGE INFORMATION

	230V
Full Load Amps	38.84A
Locked Rotor Amps	365.8A
No Load Current	11.79A
Usable at 208V	42.95A

BEARING INFORMATION

DE Bearing	6308ZZ C3
ODE Bearing	6206ZZ C3
Grease Type	NSK SN7

CAPACITOR INFORMATION

Start Capacitor	(2)550-660uF/330V
Run Capacitor	(2)60uF/500V

ADDITIONAL DATA

F2 Suitable	No
Shaft Material	1045 Carbon Steel
Connection Diagram	230V - 4 Lead
Approximate Weight	148.5 lbs.

MOTOR DRAWING


Premium Efficiency Motor: **FD10-18-215T**



Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com

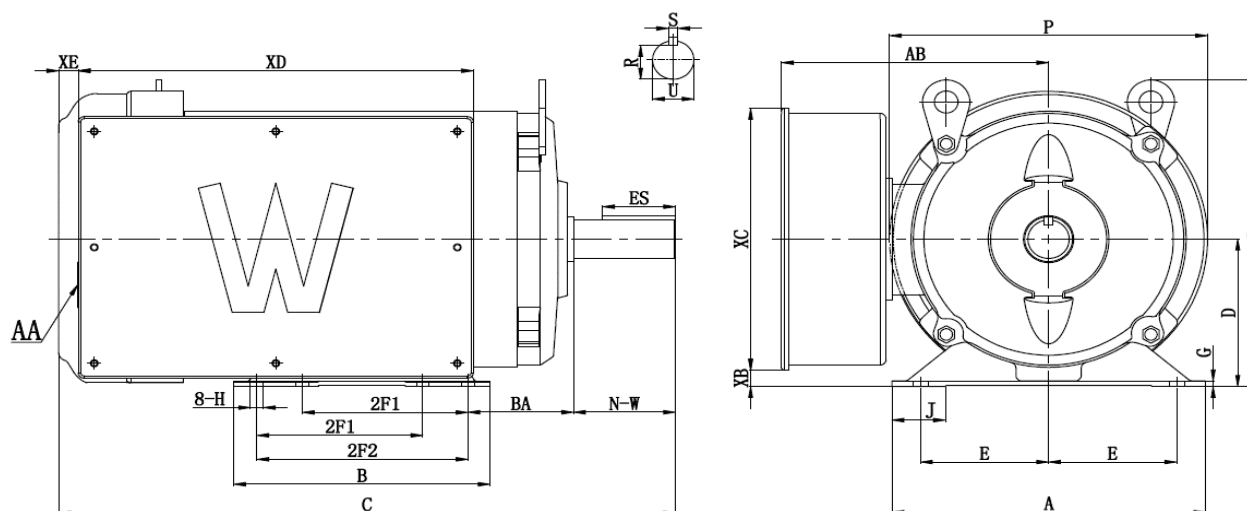

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	L	P	AB
E	2F1	2F2	H	BA								
4.25	5.5	7	0.41	3.5	9.7	8.2	20.5	5.25	0.16	11.2	10.55	8.5

KETSET	KEY			SHAFT		TERMINAL BOX					K	J
	R	ES	S	U	NW	XB	XC	XD	XE	AA		
1.201		2.41	0.312	1.375	3.38	0.5	9.6	13.4	2	1-1 1/2 NPT	--	1.8



Electrical Helper.org

For All Your Electric Needs Since 1928

411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan

Office Ph: 888-226-4917

Fax: 888-226-4917

Cell: 402-679-1579

E-Mail: kelly@electricalhelper.com



NAMEPLATE / WIRING

Premium Efficiency Motor: **FD10-18-215T**


Document Generated: 25-Sep-2024

Document ID:

Customer:



SAMPLE NAMEPLATE DATA

		HIGH EFFICIENCY-HIGH TORQUE SINGLE PHASE FARM DUTY MOTOR			
Model :		SN :	Poles : 4	<u>RATED VOLTAGE</u>  CONNECTED FOR CCW ROTATION FACING OPPOSITE DRIVE END TO REVERSE ROTATION INTERCHANGE LEAD 5 & 8 MOTOR MUST BE GROUNDED, USE GREEN LEAD IF SUPPLIED PER THE NATIONAL ELECTRICAL CODE	
HP :		Encl : TEFC	IP 55		
Hz :	60	FR :	Eff :		
Volts :	230	Ins : F	P.F. :		
Amps :		CODE :	DE BRG :		
RPM :		WT : LBS	ODE BRG :		
SF :	1.15	Max Amb 40°C - CONT	Date :		
WorldWide Electric Corporation					

Model	FD10-18-215T				
HP	10	Encl	TEFC	IP	IP55
Hz	60 Hz	Frame	215T	Nom.Eff.	87.5%
Voltage	230	Ins Cl	F	P.F.	95.9
Amps	38.84A	Code	K	DE Brng	6308ZZ C3
RPM	1764.8	WT:	148.5 lbs.	ODE Brng	6206ZZ C3
S.F.	1.15				