

**Electrical Helper.org**For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan

Office Ph: 888-226-4917

Fax: 888-226-4917

Cell: 402-679-1579

E-Mail: kelly@electricalhelper.com

**WorldWide**
ELECTRIC CORPORATION

DATA SHEET

Premium Efficiency Motor: **SSPE1-12-145TC,****60 Hz**Document Generated: 22-Feb-
2023
Document ID:

Customer:

MOTOR INFORMATION

HP	1
RPM	1200
Phase	3
Frequency	60
Voltage	230/460
Frame Size	145TC
Enclosure	TEFC
Degree of Protection	IP69K
Service Factor	1.15
Poles	6
Full Load	1165
Speed	F
Temperature Class	80°C
NEMA Code Letter	N
Duty Cycle	S1
Slip	2.92%
NEMA Design	B
Moment of Inertia	0.143 lb.ft.^2
Locked Rotor Time	12 seconds
(Hot) Sound Pressure	55 dB(A)
Number of Starts	12
Max Ambient Temperature	40° C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bidirectional
Area of Classification	Div.2 Class I, Gr. A,B,C&D T2B
Inverter Rating	10:1 CT/20:1 VT
Standard	NEMA MG1,
Approvals	UL1004 CSA,UL,CE

EFFICIENCY/POWER

FACTOR	LOAD	EFF	P. F.
100%		82.5	
%	0.6875	75.0%	0.5
50%		9	
		72.0%	0.5

TORQUE

FULL LOAD	LRT	BD
4.4 lb.ft.	255 %	270 %

AMPERAGE INFORMATION

	230V	460
Full Load Amps	V	
Locked Rotor	4	2
Amps No Load	30	15
Current Usable at 208V	3	4

BEARING INFORMATION

DE Bearing	6205 2RS
ODE Bearing	6205 2RS
Grease Type	Mobil Polyrex

EM

ADDITIONAL DATA

F2 Suitable	No
Shaft Material	304 Stainless
Connection Diagram	Steel
Approximate	9 Lead 2Y/Y
Weight	42 lbs.



Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467


AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



MOTOR DRAWING

Premium Efficiency Motor: **SSPE1-12-145TC**

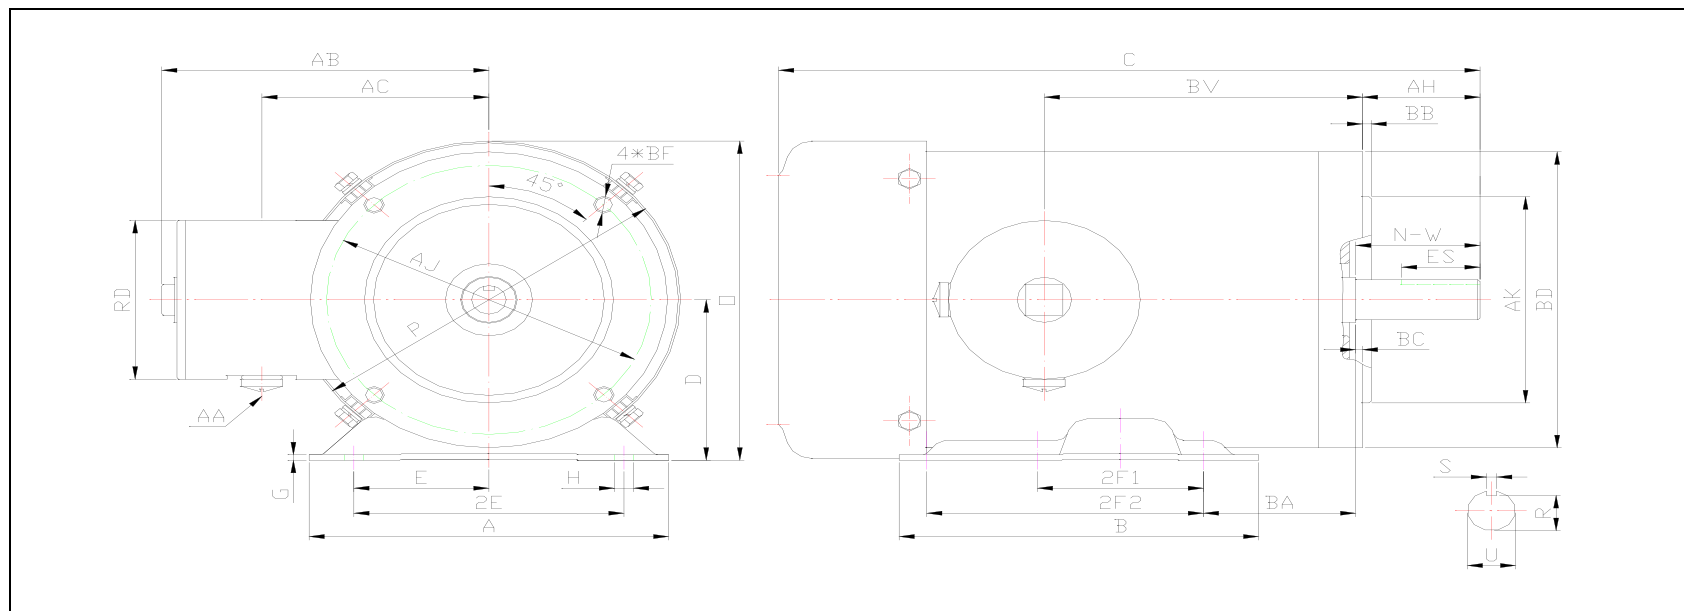

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	P	O	T	AB
E	2F1	2F2	H	BA									
2.75	3	5	1.22*0.34	2.75	6.5	6.5	12.63	3.5	0.118	6.95	6.98	N/A	5.95

SHAFT & KEY					
S	ES	R	N-W	U	AH
0.188	1.41	0.771	2.25	0.875	2.12

TERMINAL BOX				
AA	AB	AC	RD	BV
1/2 NPT	5.95	4.5	3.45	5.75

FLANGE					
AK	BD	AJ	BF	BB	BC
4.5	6.45	5.875	4*3/8-16	0.16	0.12



PERFORMANCE CURVES

Premium Efficiency Motor:

SSPE1-12-145TC

Document Generated: 30-Jan-2023


Document ID:

Customer:


Motor Type	SSPE		FL Speed	1165	
Output Rating	1		LRT (%FLT)	255	460 volt FLA 2
(HP) Full Load	4.4	lb.ft	BDT (%FLT)	270	230 volt FLA 4
Torque Rotor	0.143	lb-ft^2			

Wk^2

SPEED VS TORQUE & CURRENT CURVE

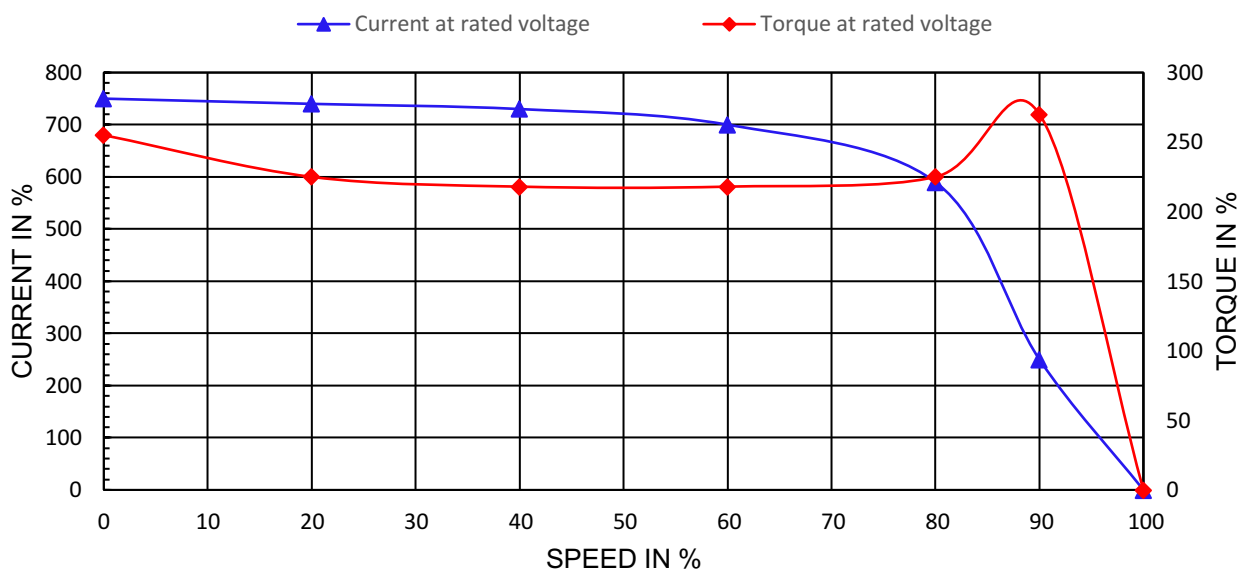

OUTPUT VS EFF., P.F. & CURRENT CURVE

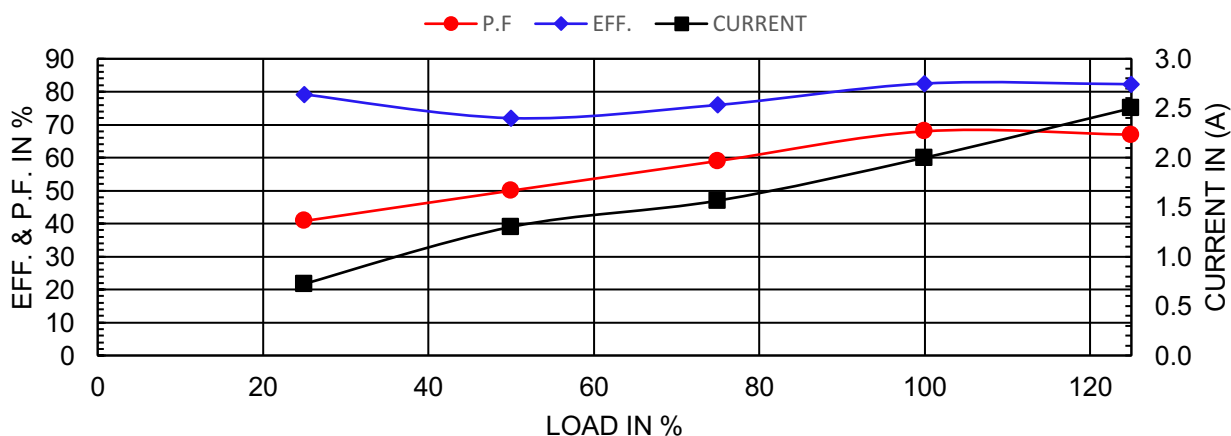

NAMEPLATE / WIRING

Premium Efficiency Motor: **SSPE1-12-145TC**



Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



Document Generated: 30-Jan-2023

Customer:

Document ID:

SAMPLE NAMEPLATE DATA

		THREE PHASE AC INDUCTION MOTOR				NEMA® Premium	
		INVERTER DUTY 20:1 VT 10:1 CT					
Model .		FRAME		IP 69K	LB/WT	230V 	
Hz 60	S. F. 1.15	Hz 50	S. F. 1.15	ENCL. TEFC	AMB. 40°C		
HP	RPM	HP	RPM	DUTY CONT	INS. F		
VOLTS 230/460		VOLTS 190/380		NEMA DES. B		460V 	
AMP		AMP		BRG DE			
CODE	P. F.	CODE	P. F.	BRG ODE			
EFF	MIN	IE3 -		NO.			
				CC082A			

Model	SSPE1-12-145TC	FRAME	145TC	LB/WT	42 lbs.
Hz	60	S.F.	1.15	Hz	50
HP	1	RPM	1165	HP	3/4
VOLTS	230/460	VOLTS	190/380		
AMPS	4/2	AMPS			
CODE	N	P.F.	0.68	CODE	319
EFF	82.5%	MIN	72%	IE3 -	
	77.2% BRG DE	6205			
	2RS BRG				
	ODE	6205 2RS			