



DATA SHEET

Premium Efficiency Motor: **SSPE12-12-56CRD,****60 Hz**Document Generated: 22-Feb-2023
Document ID:

Customer:

MOTOR INFORMATION

HP	1/2
RPM	1200
Phase	3
Frequency	60
Voltage	230/460
Frame Size	56C
Enclosure	TEFC
Degree of Protection	IP69K
Service Factor	1.15
Poles	6
Full Load	1155
Speed	F
Temperature Class	80°C
NEMA Code Letter	R
Duty Cycle	S1
Slip	3.75%
NEMA Design	B
Moment of Inertia	0.088 lb.ft.^2
Locked Rotor Time	12 seconds
(Hot) Sound Pressure	55 dB(A)
Number of Starts	12
Max Ambient Temperature	40° C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bidirectional
Area of Classification	Div.2 Class I, Gr. A,B,C&D T2B
Inverter Rating	10:1 CT/20:1 VT
Standard	NEMA MG1,
Approvals	UL1004 CSA,UL,CE

EFFICIENCY/POWER

FACTOR	LOAD	EFF	P. F.
100%		80.0	
%	0.6375%		0.5
50%	5		
		69.0 %	0.4
		7	

TORQUE

FULL LOAD	LRT	BD
7.2 lb.ft.	255 %	270 %

AMPERAGE INFORMATION

	230V	460
Full Load Amps	V	
Locked Rotor	1.8	0.
Amps No Load	9	
Current Usable at 208V	20	10
	1.8	0.
		9

BEARING INFORMATION

DE Bearing	6205 2RS
ODE	6205 2RS
Bearing	Mobil Polyrex
Grease Type	EM

ADDITIONAL DATA

F2 Suitable	No
Shaft Material	304 Stainless Steel
Connection Diagram	9 Lead 2Y/Y
Approximate Weight	29 lbs.

MOTOR DRAWING

Premium Efficiency Motor: **SSPE12-12-56CRD**




Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



WORLDWIDE
ELECTRIC CORPORATION

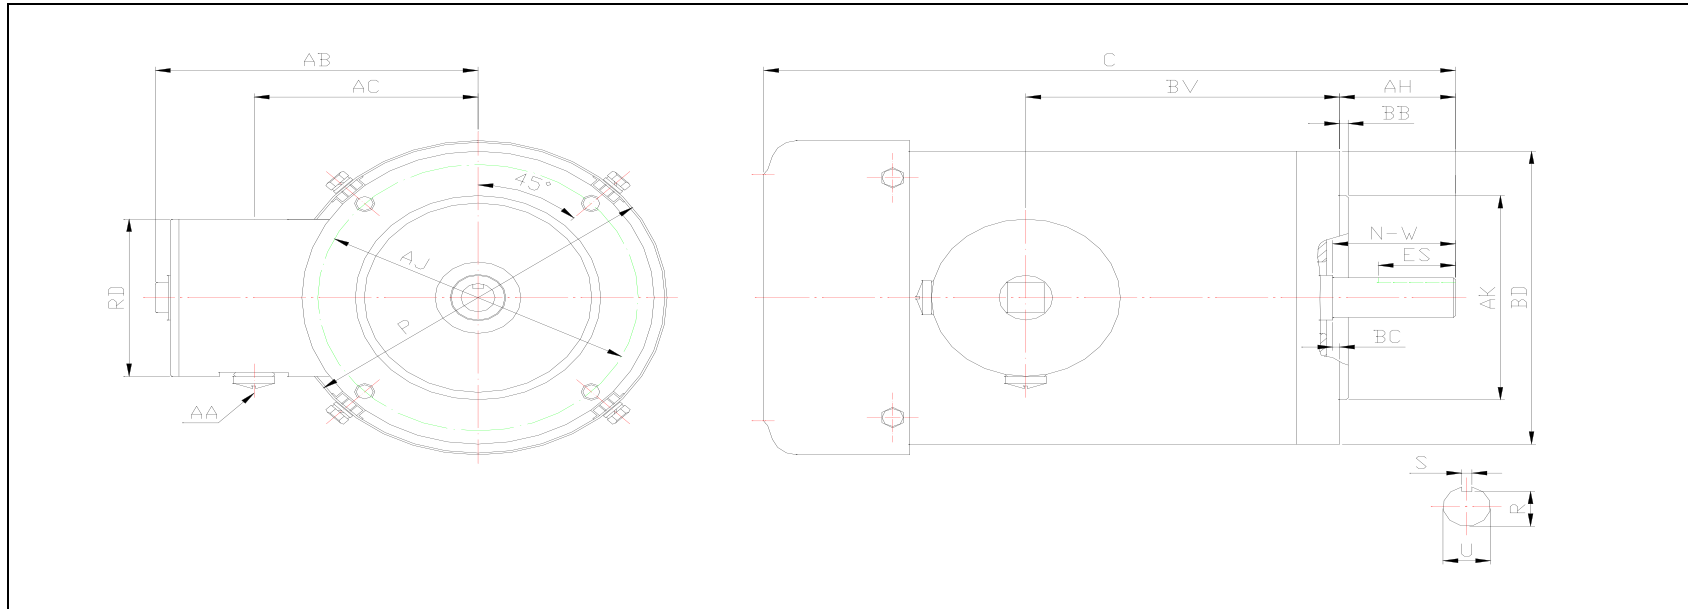

DIMENSION - INCHES

FLANGE MOUNTING						C	P	T	AB
AK	BD	AJ	BF	BB	BC				
4.5	6.45	5.875	4*3/8-16	0.16	-0.19	11.59	6.95	N/A	5.95

SHAFT & KEY					
S	ES	R	N-W	U	AH
0.188	1.41	0.517	1.88	0.625	2.06

TERMINAL BOX				
AA	AB	AC	RD	BV
1/2 NPT	5.95	4.5	3.45	4.75



Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL
Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



PERFORMANCE CURVES

Premium Efficiency Motor:

SSPE12-12-56CRD

Document Generated: 31-Jan-2023


Document ID:

Customer:


Motor Type	SSPE		FL Speed	1155	
Output Rating	1/2		LRT (%FLT)	255	460 volt FLA 0.9
(HP) Full Load	2.2	lb.ft	BDT (%FLT)	270	230 volt FLA 1.8
Torque Rotor	0.088	lb-ft^2			

Wk^2

SPEED VS TORQUE & CURRENT CURVE

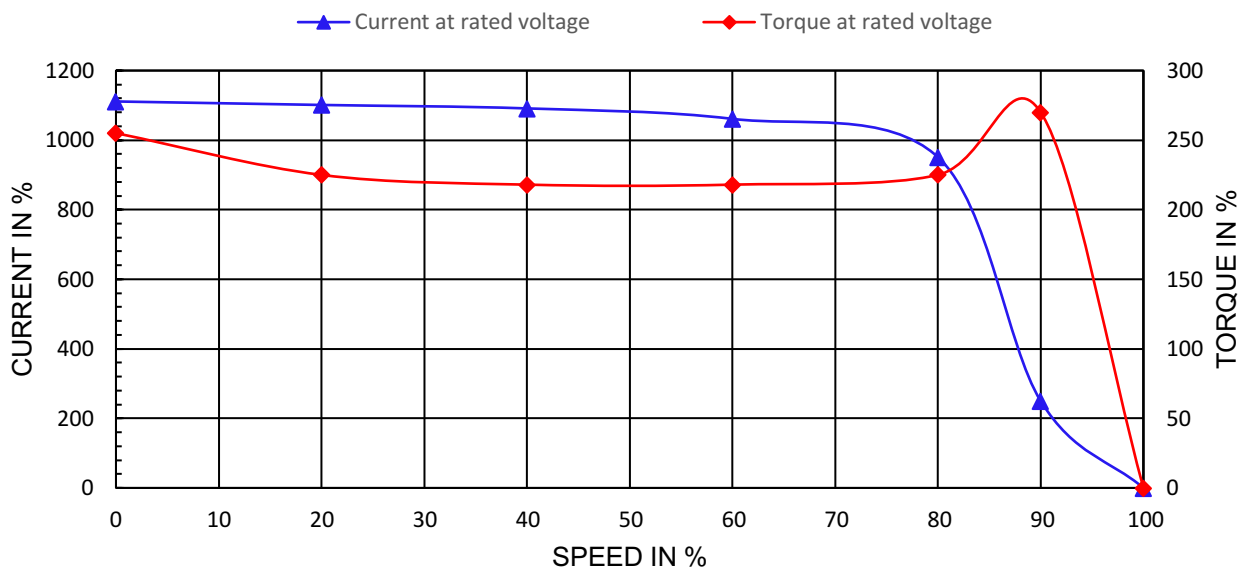

OUTPUT VS EFF., P.F. & CURRENT CURVE

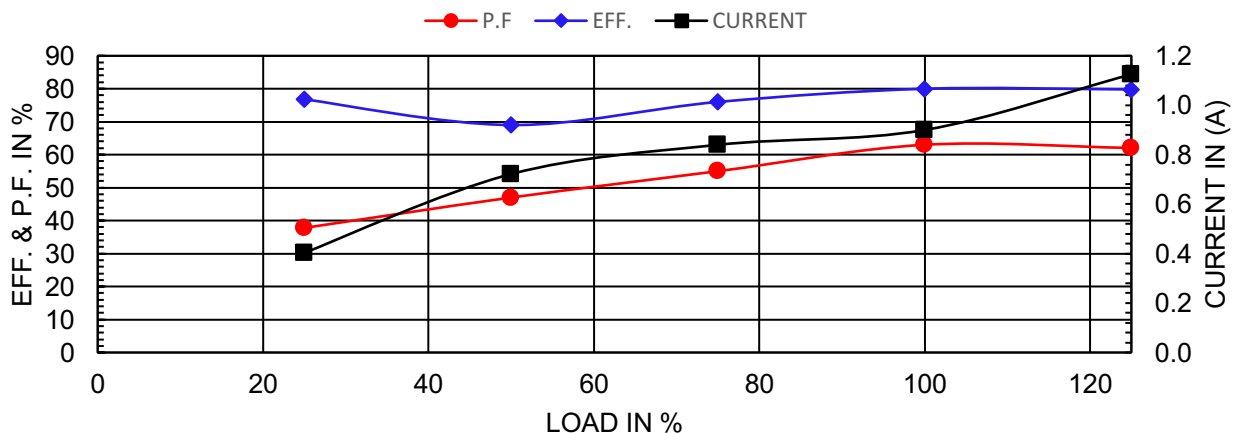



Electrical Helper.org
For All Your Electric Needs Since 1928
411 N Platte Ave. York, NE. 68467

AC-DC MOTORS :: SALES & SERVICE
REWINDING :: CUSTOM CONTROL PANEL

Kelly MacMillan
Office Ph: 888-226-4917
Fax: 888-226-4917
Cell: 402-679-1579
E-Mail: kelly@electricalhelper.com



NAMEPLATE / WIRING

Premium Efficiency Motor:

SSPE12-12-56CRD

Document Generated: 31-Jan-2023

Customer:

Document ID:

SAMPLE NAMEPLATE DATA

		THREE PHASE AC INDUCTION MOTOR				NEMA®	
		INVERTER DUTY 20:1 VT 10:1 CT				Premium	
Model .		FRAME		IP 69K	LB/WT		
Hz 60	S. F. 1. 15	Hz 50	S. F. 1. 15	ENCL. TEFC	AMB. 40°C		
HP	RPM	HP	RPM	DUTY CONT	INS. F		
VOLTS 230/460		VOLTS 190/380		NEMA DES. B			
AMP		AMP		BRG DE			
CODE	P. F.	CODE	P. F.	BRG ODE			
EFF	MIN	IE3 -		NO.			

Model	SSPE12-12-56CRD			FRAME	56C	LB/WT	29 lbs.
Hz	60	S.F.	1.15	Hz	50	S.F.	1.15
HP	1/2	RPM	1155	HP	1/3	RPM	970
VOLTS		230/460		VOLTS		190/380	
AMPS		1.8/0.9		AMPS		1.5/0.7	
CODE	R	P.F.	0.63	CODE	5 P	P.F.	0.71
EFF	80%	MIN	69%	IE3 - 68.6%			
BRG DE		6205 2RS					
BRG ODE		6205					
2RS							